

Sriroof




Authorised Distributor For

JSW Colouren +
Premium Al-Zn
Colour Coated
Sheets

JSW Pragati +
Colour Coated
Sheets

JSW Vishwas +
Premium Al-Zn
Sheets

-Double trapezoidal profile

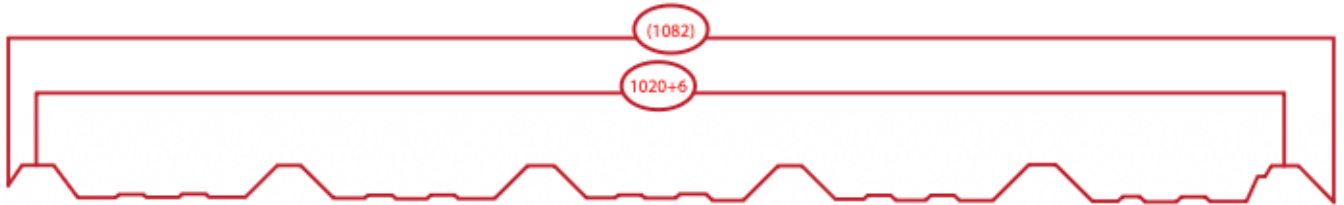

Double trapezoidal profile sheets are having better stiffness and best suited for higher wind loads .rain water flows easily and the anti capillary groove (ACG) prevents any water leakage in the lapping areas .this profile can be used for roof and as well as for wall cladding . This profile sheet can be crimped as full and end curve sheets to suit with the truss.
Material:PPGL


Colours available



Torquoise
Blue




Light
Blue



Mist
Green



Off White




Brick Red



Terracotta

crimped sheet

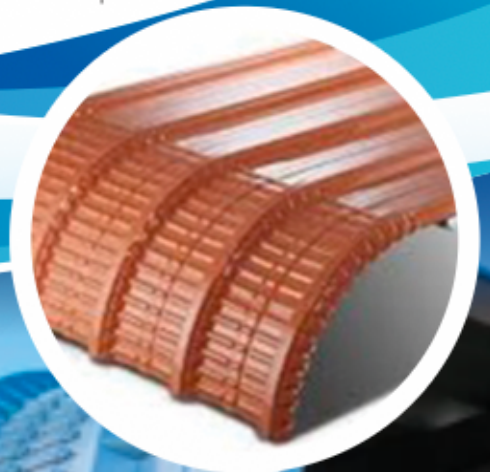

-Euro tile

Tile profile sheet looks unique with elegant design , without compromising the traditional look .Be it homes or work space they enhance the beauty of the building even better.Euro tile is most noval concept that is all set to change the prevailing trends in the roofing industry.

Material :PPGL

Colours available



Brick red(1)



Terracota




-Tile thoranam and tile ridge



-Accessories

WATER GUTTER CAGE


(All dimensions are in mm)

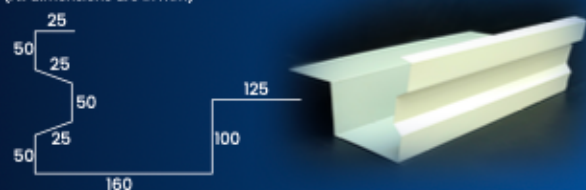

DOWN PIPE




BARZE BOARD

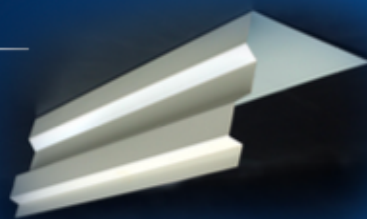


BOARDER FLASH

(masonry trim)




WATER GUTTER (Medium 407mm)

(All dimensions are in mm)

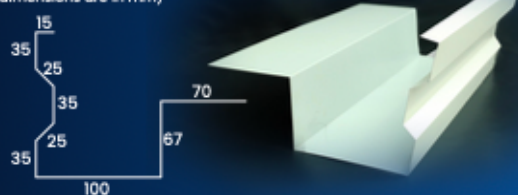

PLAIN RIDGE



CORNER FLASH



PROFLED RIDGE



-Product's Available



Screws and cyclone washer

Tata Agrico Self Drilling screws are of high quality range & are used for roofing applications. They come with EPDM washer & are Grey Russpart (Teflon) Coated for better corrosion protec-

Cyclone washers are used for better and tight fitting of sheets than simple screws.



Poly carbonate sheets

A polycarbonate sheet is transparent Corrugated/Clear sheets used in combination with Steel sheets or as it is to enable natural lighting into the steel buildings.



Insulation material


SUPREME INSULATION MATERIAL is a non-fibrous, fire retardant (FR), closed cell, tri-dimensional chemically crosslinked polyethylene foam.



TURBO VENTILATORS


Wind driven industrial turbo roof ventilators are designed to exhaust hot air and industrial pollutants such as poisonous gases, fumes, heat, humidity, odor, stale air, dampness and other invisible irritants and Pollutant particles from the building and industrial sheds.



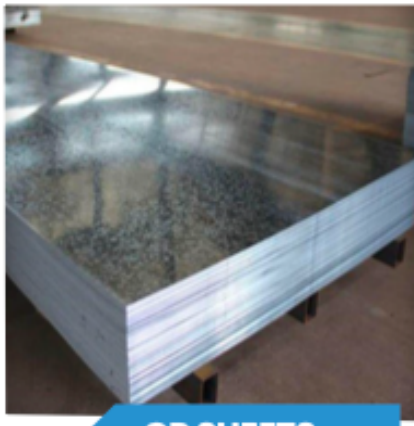


GP SHEETS

It is a cold rolled sheet that is coated with zinc metal which is known as Galvanising. These sheets are used in roofing and panelling, automobile bodies, trunks/boxes, ducting, cooler bodyTrunks, Ice Boxes, Household Machines, Tubs, Pails, Buckets, Storage Bins, Water Tanks, Washing machines, Bathroom Doors, and many other products. GP Steel sheets are made from good quality steel that are resistant to rust.

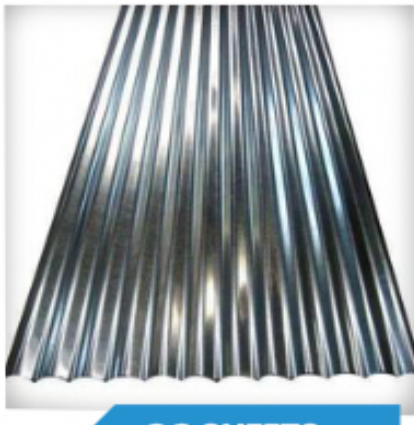

GC SHEETS

GC Sheet is a corrugated galvanized Plain sheet generally used in roofing purpose

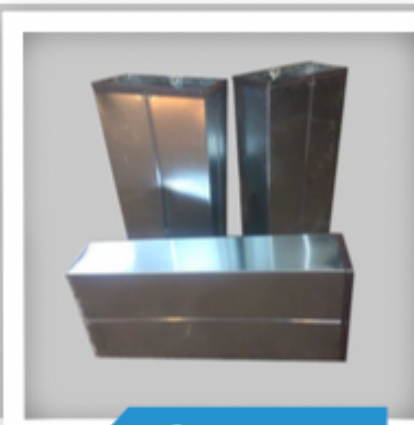

Ice cans

Ice cans are used in ice factories to prepare ice for aqua culture and other needs.

-Installations

Placement of Groove Portion



Right way

The groove portion should be on the inner side. The air gap on the left ensures that water does not travel upwards



Wrong way

The groove portion should not be on the outer side. Improper contact makes the roof vulnerable to water leakages.



Proper fastener installation procedures to be followed

1. Do not allow direct contact with cement or cement foundation.
2. Accelerated corrosion can occur due to lime contained in the cement.
3. Do not leave metal fillings on the sheets.
4. Metal debris from sawing, drilling and other construction processes should be removed during installation. Otherwise, the metal fillings will form red rust on the surfaces where they were deposited. Red rust of the metal fillings may cause stain or discoloration on the surface of the panel.
5. Do not install the roof sheets during rains as sheets get wet and slippery and can cause damage to the sheets.
6. It is important that shoes do not have small stones, steel drillings, etc. embedded into the soles.
7. Do not allow dirt accumulation on the sheets.



-Storage and Handling

If Colour Coated sheets are to be stored for any time prior to forming or installation, they must be stored in dry and well ventilated conditions. Storage which allows water (including condensation) to be trapped between the sheets may damage the coating beyond repair.


✓ DO'S

1. Always keep the material in a dry, shaded and good ventilated area.
2. If not required for immediate use, provide cover to protect the material.
3. If the sheets become wet during storage, separate them without delay. Clean the moisture on the surface with a clean cloth. Stack the sheets with gaps between them for air
4. Always keep the material slightly above the ground by using wooden or rubber plank.

✗ DONT'S

1. Do not keep the material on wet floor (water, rain, etc.).
2. Moisture or water penetration between the sheets through the wooden pallets can cause damage hence it should be avoided.
3. Do not let the water leak inside the packed coils.
4. Metal-on-metal contact should be avoided whenever possible.
5. Do not let the sheets come in contact with salt, water, corrosive chemicals, ash, fumes, foundries, plating works, kilns, fertilizers and wet or green lumber.
6. Do not slide sheet on rough surface or over each other.
7. Contact with water and mud should be strictly prohibited.

Disclaimer on Condensation:

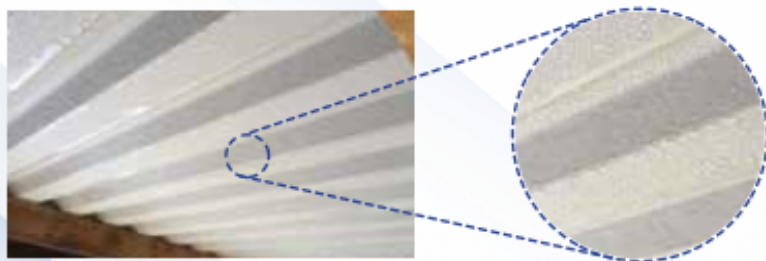

Condensation is the phenomenon of formation of water droplets on the bottom side of any installed metal roofing sheet. It may occur when there is a difference in temperature between air in the building and the sheet, it causes water vapour (moisture) in the air to condense on the inside of the sheet. It is a natural phenomenon and hence no claims will be entertained in this regard. The risk of condensation may be minimized by providing proper ventilation arrangement in the roofs and by using suitable insulation.

-Mark of Ingenuity

All genuine JSW Colouren+ sheets come with special non-erasable liner marking. The below liner markings have been created to ensure that you get the original high quality product.

Non-Erasable Liner Marking

JSW Colouren+

JSW COLOURON+ X.XX MM AZXXX P DD MM YY (ISI) 15965 BIS APPROVED

(where, P is location code: V – Vasind, T – Tarapur, K – Kalmeshwar, R – Rajpura, I – Indore)

JSW Colouren+ – High Gloss

JSW COLOURON+ HG X.XX MM AZXXX P DD MM YY (ISI) 15965 BIS APPROVED

(where, P is location code: V – Vasind, T – Tarapur, K – Kalmeshwar, R – Rajpura, I – Indore)

JSW Colouren+ – High Gloss & Anti-Dust

JSW COLOURON+ HG + AD X.XX MM AZXXX P DD MM YY (ISI) 15965 BIS APPROVED

(where, P is location code: V – Vasind, T – Tarapur, K – Kalmeshwar, R – Rajpura, I – Indore)

JSW Colouren+ – Cool Roof

JSW COLOURON+ CR X.XX MM AZXXX P DD MM YY (ISI) 15965 BIS APPROVED

(where, P is location code: V – Vasind, T – Tarapur, K – Kalmeshwar, R – Rajpura, I – Indore)

Watermark Logo

JSW Colouren+ sheets come with a watermark logo authentication. Watermark logo helps to differentiate JSW Colouren+ sheets from other brands.



-Contact Us

- Facebook** — <https://www.facebook.com/knvlkumar>
- Instagram** — <https://www.instagram.com/vamsi.sriroof/>
- Just dial** — https://www.justdial.com/jdmart/Bhimavaram/Sriroof-Industries-Pvt-Ltd-Opposite-Balaji-WeighBridge-Bhimavaram-Bazar/9999P8816-8816-161008180030-B3L1_BZDET/catalogue
- Linkedin** — <https://www.linkedin.com/in/kancharla-vamsi-4796948a/>
- Phone office cell** — 9133523455, 7799950135
— 7095027999, 7095024999
- Address** — 3-222, undi road, narasimhapuram, opposite balaji weigh bridge, bhimavaram town, west godavari district, andhra pradesh-534202
- e-mail** — vamsi.sriroof@gmail.com
- Website** — <https://jswsriroof.com/>

